

FIG. 1 is a perspective view of a device 10 in a first configuration. The device 10 includes a first component 12, a second component 14, a third component 16, and a fourth component 18. The first component 12 is a circular plate with a central opening 24. The second component 14 is a ring-shaped structure with a central opening 24. The third component 16 is a cylindrical structure with a central opening 24. The fourth component 18 is a ring-shaped structure with a central opening 24. The device 10 is shown in a perspective view, with the components 12, 14, 16, and 18 arranged around the central opening 24. The device 10 is shown in a perspective view, with the components 12, 14, 16, and 18 arranged around the central opening 24.

10

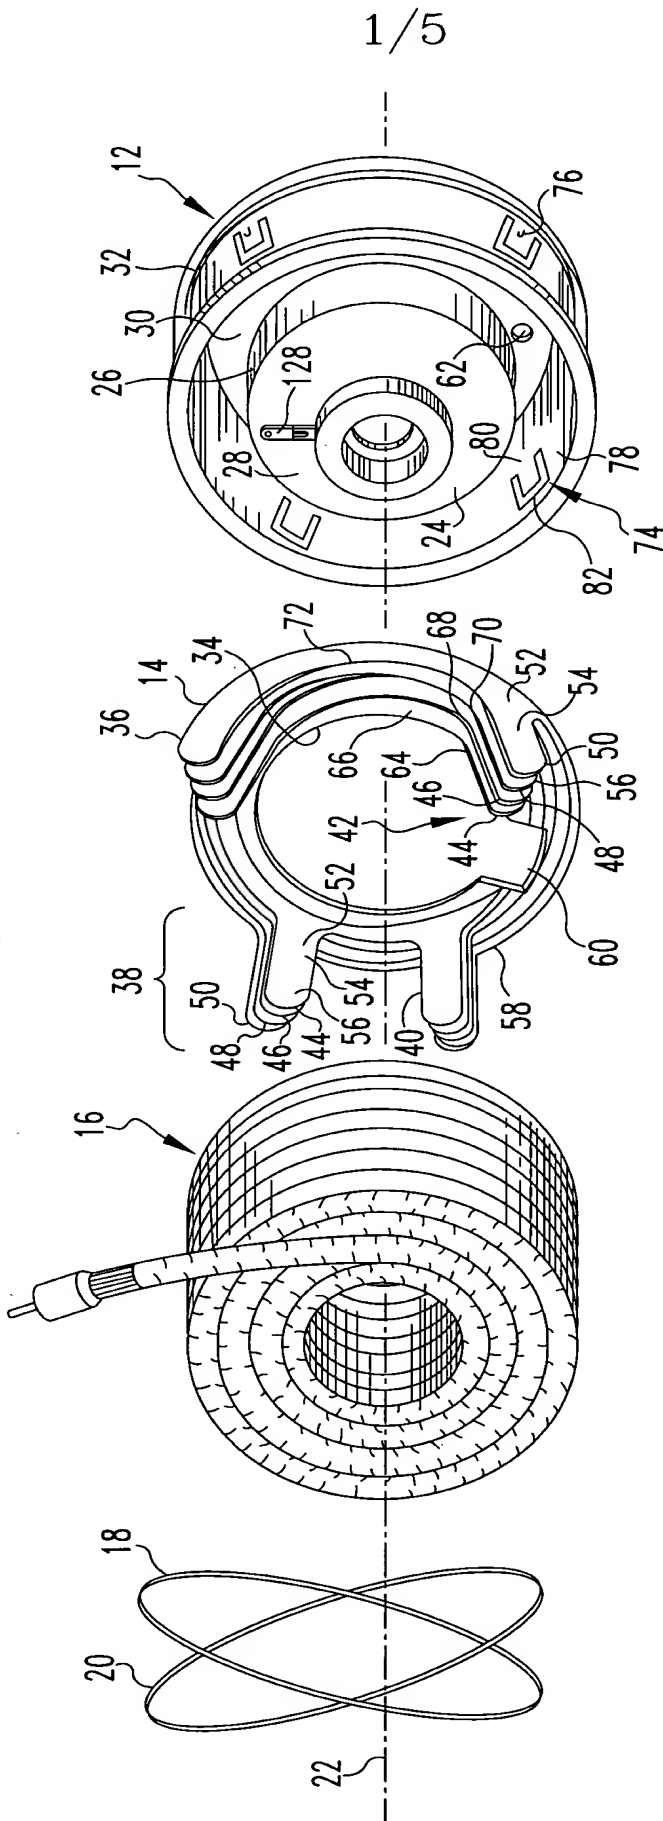


FIG. 1

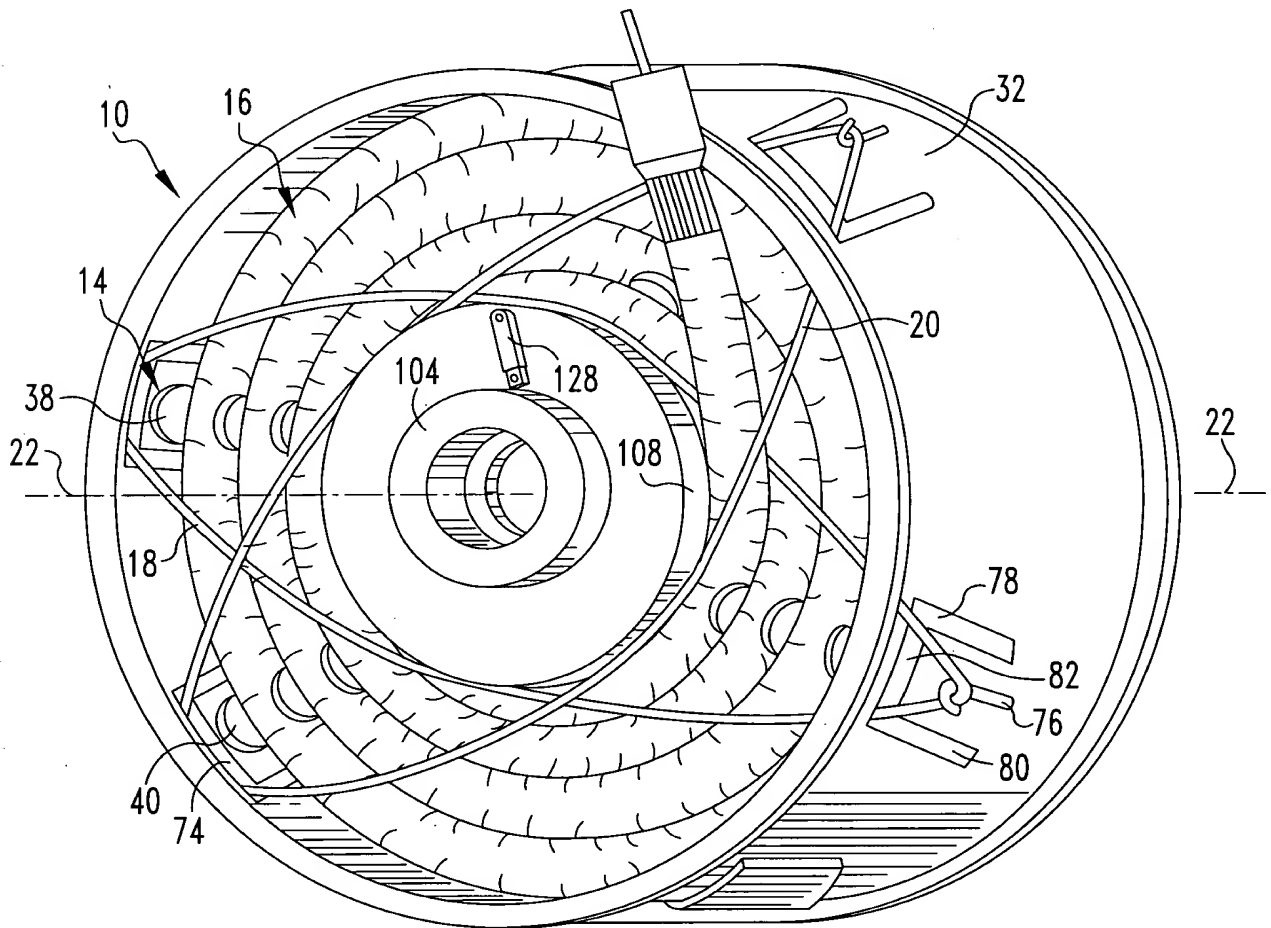


FIG. 2

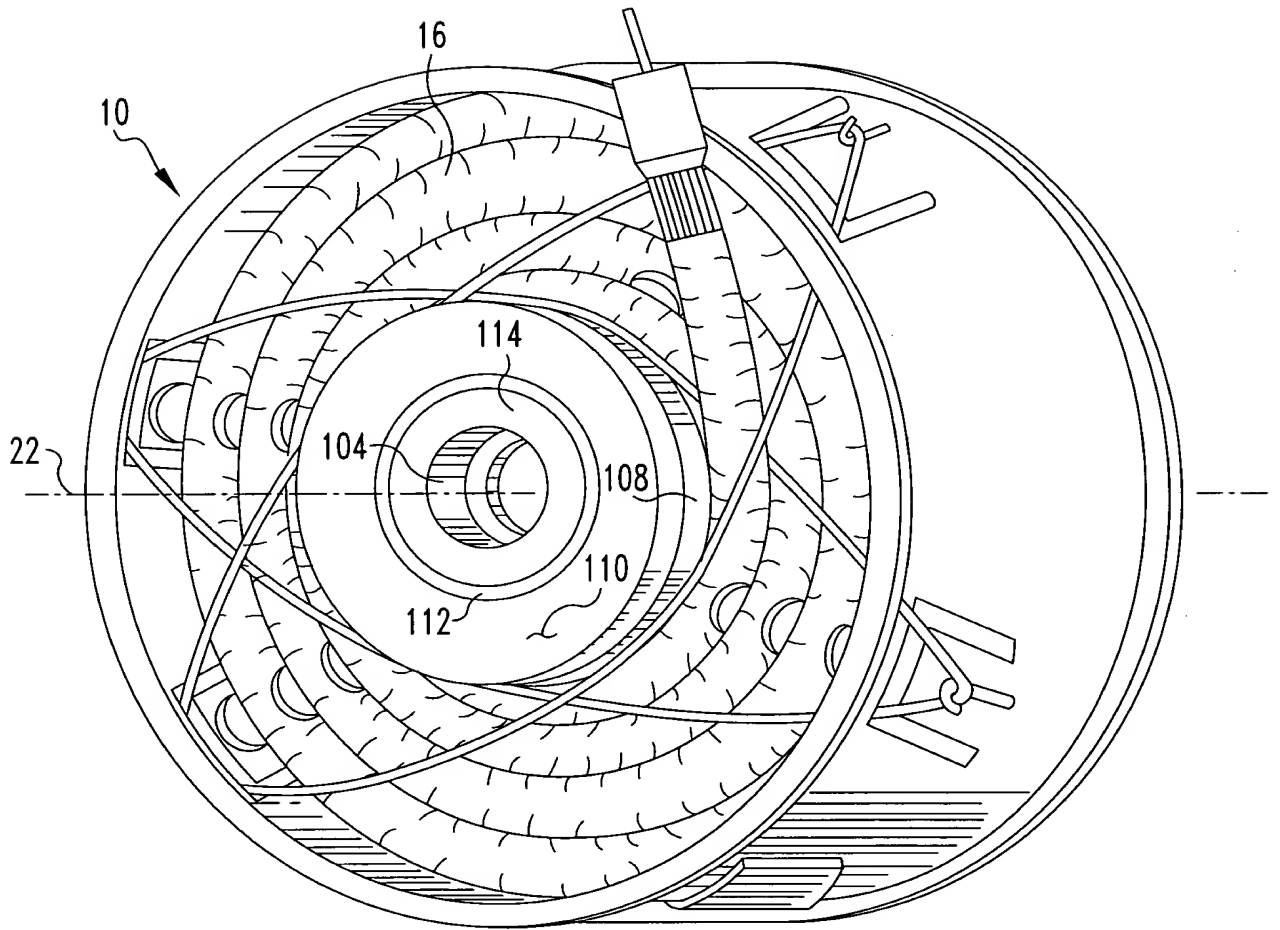
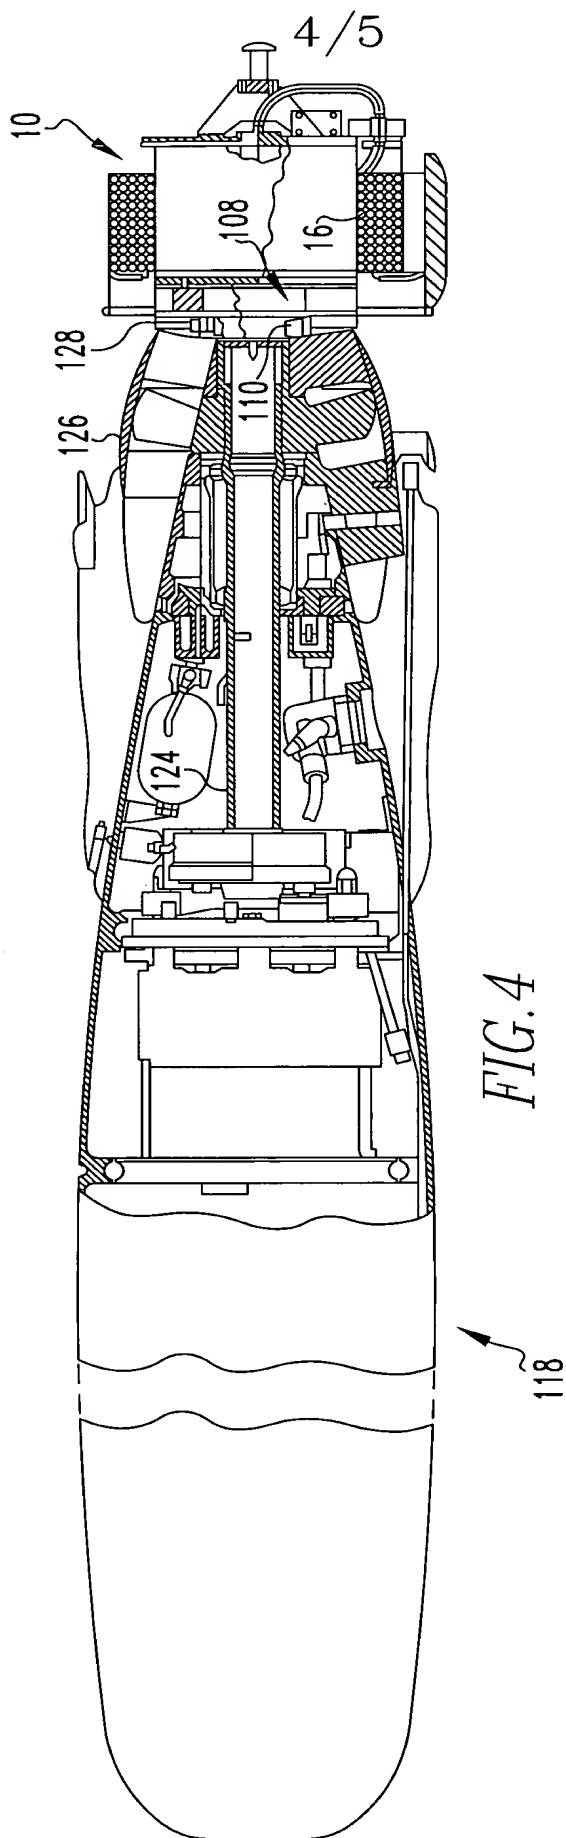


FIG. 3

FIG. 4 is a cross-sectional view of the device 100 in a closed position, showing the internal components and the housing 118.



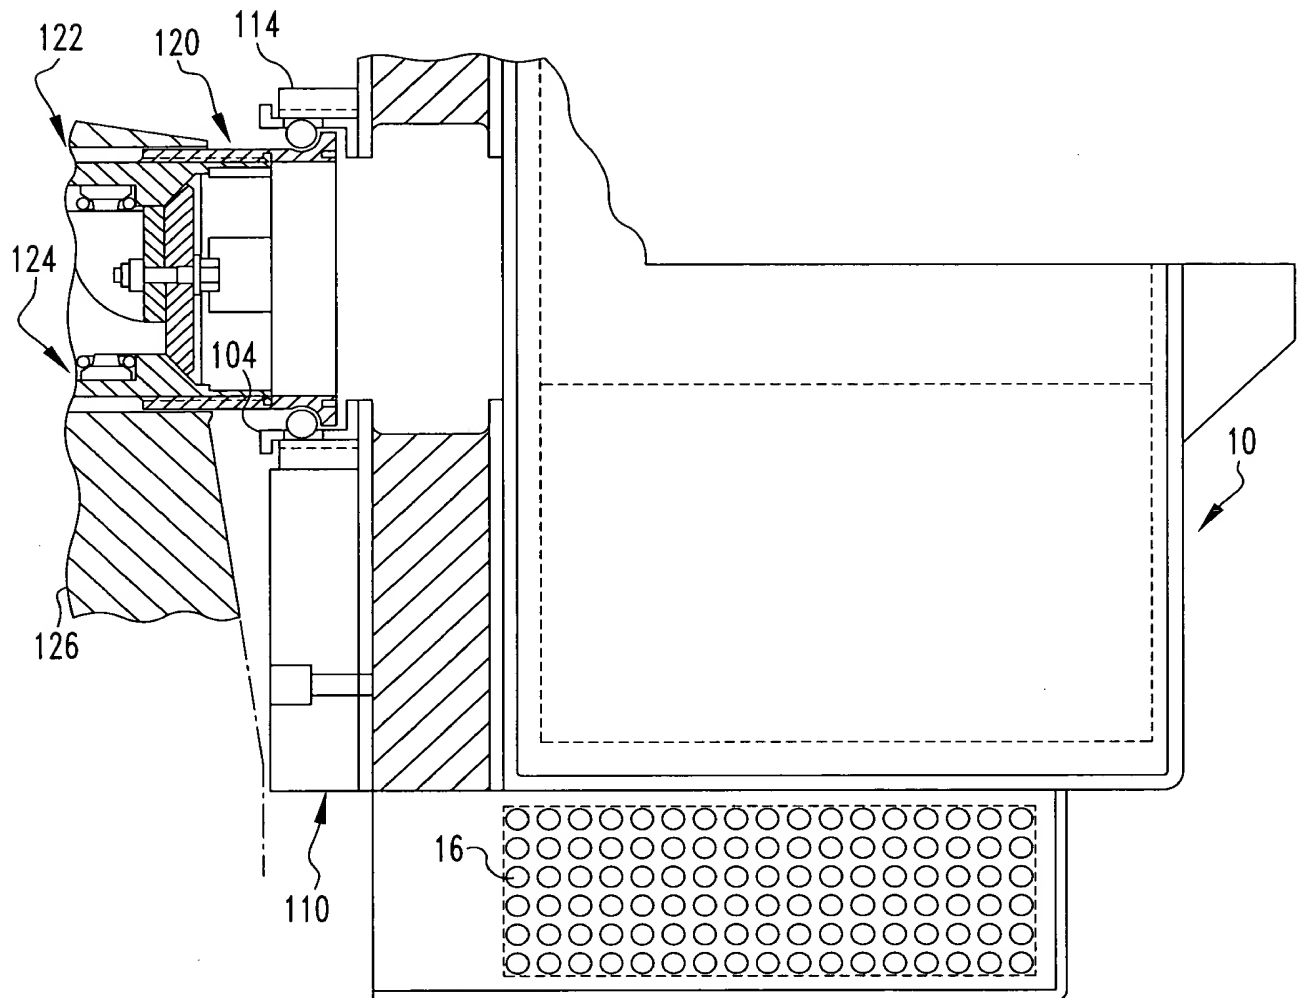


FIG. 5